think:water **Profine**

100

Filtered water makes the best ice Feeding the ice maker with contaminated or hard water produces dirty, cloudy ice that melts in drinks and alters their flavour.


Water and ice Filtered water makes the best ice. Feeding the ice maker with contaminated or hard water produces dirty, cloudy ice that melts in drinks and alters their flavour.



tw produces according to MOCA compliance food



w produces with quality ISO 9001:2015 and environmental ISO 14001:2015 nanagement system certified by TÜV SÜD

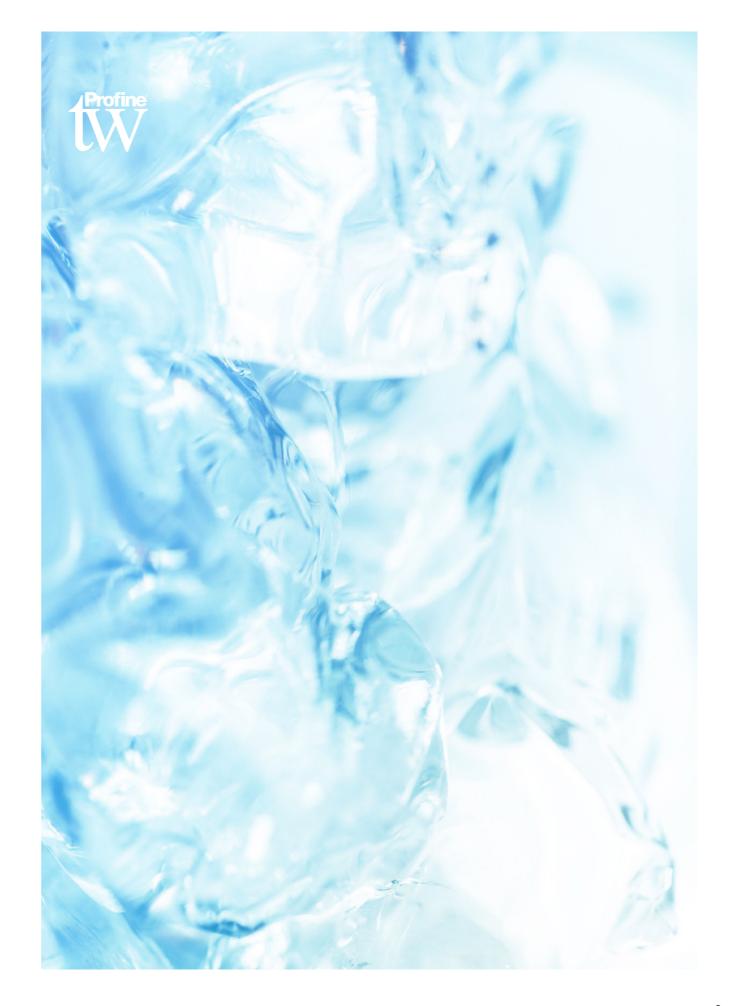

Not all water is the same



It is important to refine the water so that the ice machine can produce clean ice. If the water tastes bad, smells bad or contains particles, your ice will look, taste and smell just like the water. So, it's important to filter the water that makes the ice.

Improve your ice

An ice filtration system filters the water that feeds the ice machine by eliminating chlorine, particulate matter and other contaminants that make the ice cloudy. Hard water should be treated by acting on the minerals responsible for the opaque appearance of the ice.



Untreated water

Untreated water contains high levels of sediments and could damage or obstruct the machine.



ZERO PRO + BLUE BLUE + ICE



Hard wate

Hard water contains high levels of calcium and magnesium.



- ICEZERO PRO
- EASY:WASH




Soft water

Soft water contains only small amounts of calcium, magnesium and carbonates.




• ICE

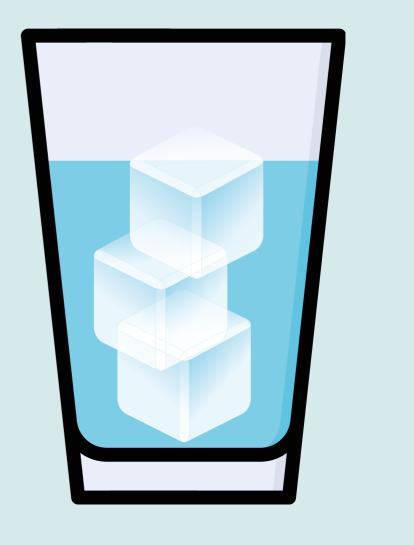


Treatment is worth it

Hard water creates build-up of limescale, which is a problem in ice production. When the water freezes, the minerals crystallise and make the ice opaque. Not to mention that the internal operation of the ice machine suffers from the formation of build-up of limescale. Limescale in the long run damages the equipment, which is why it is important to be in control of it, using a water softener, a polyphosphate filter or reverse osmosis.



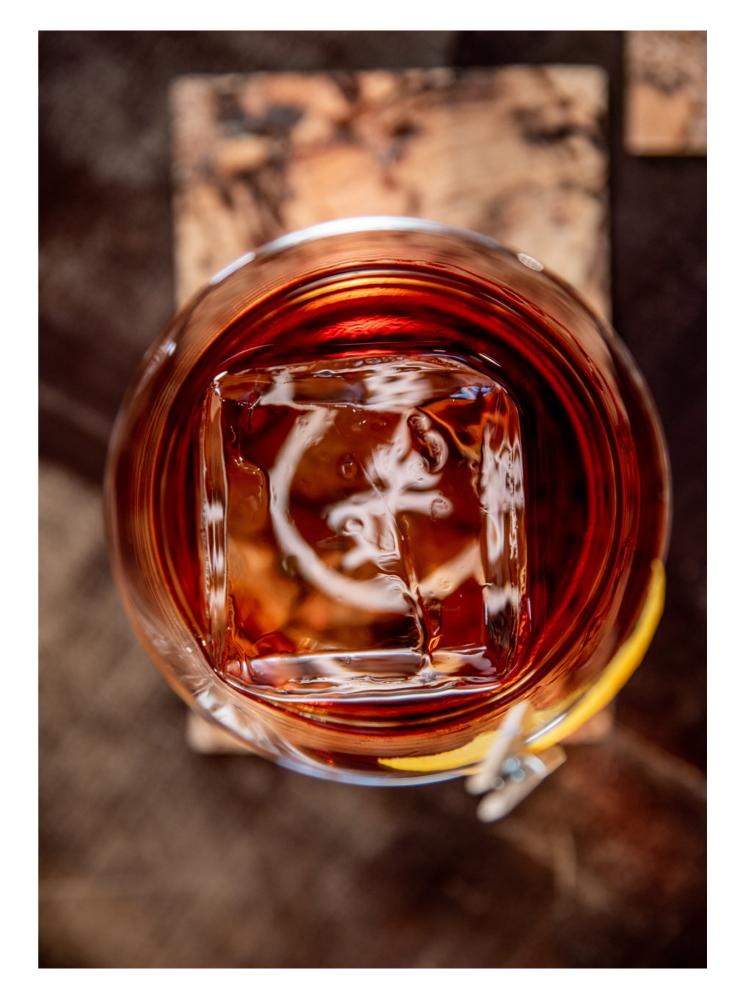

Water treatment methods

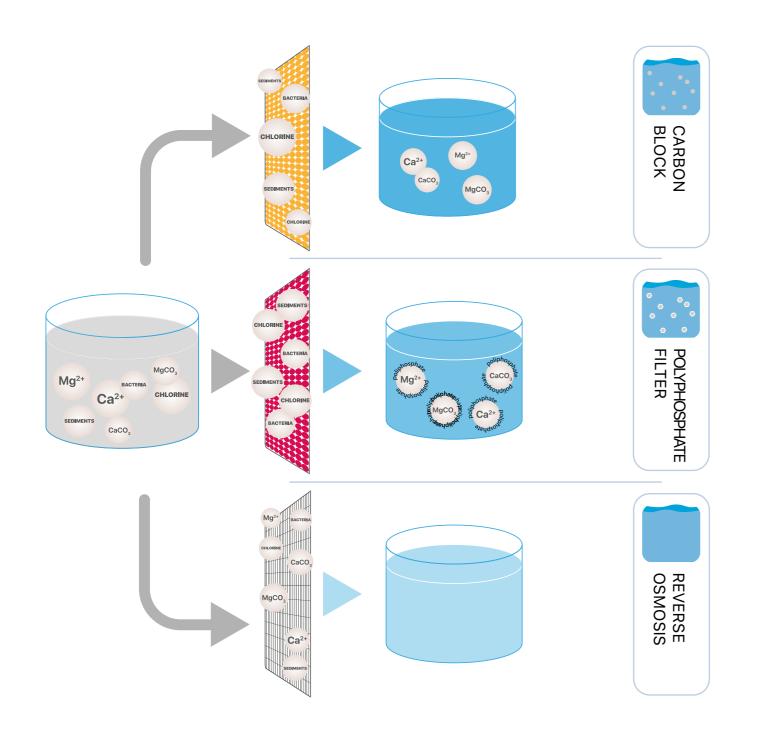

Water treatment for ice occurs mainly in three ways.

The use of filters allows all those substances that alter its taste and smell or compromise its potability to be eliminated from the water. Activated carbon is used to control flavors and odors, such as Carbon Block Profine®, which thanks to its adsorption properties, intercepts particulate matter and chlorine, while for toxic substances, such as pfas nitrates and arsenic, specially designed filters are used.


Through the use of polyphosphate filters, calcium and magnesium ions are "coated", preventing their aggregation, in this way no visible particles (calcium carbonates and magnesium) are produced making the ice more transparent.

Thanks to the very high degree of filtration that characterises reverse osmosis machines, it is possible to obtain extremely "clear" water, that is, free of suspended particles, whatever they may be. This lets you obtain an ice that is almost completely transparent and without any taste at all, so that it does not alter the taste of the drinks, only makes them colder!

Carbon Block

Polyphosphate Filters

Reverse osmosis

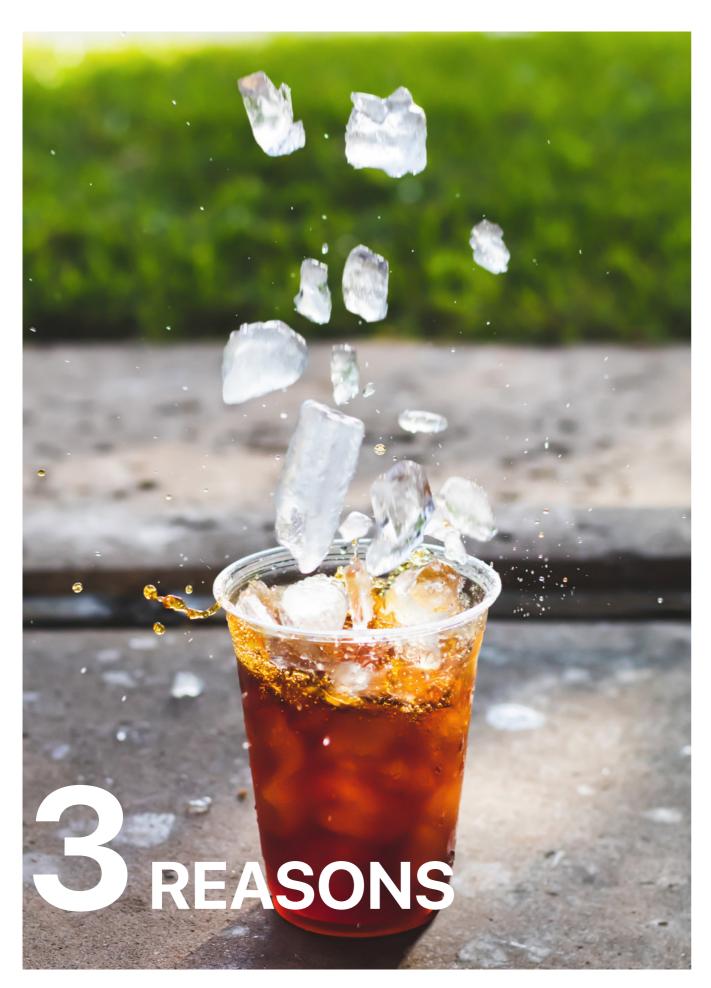

01

Refining the water for the ice maker means obtaining ice with no taste of its own, therefore, not altering the taste of the drinks into which it is placed.

ce for cooling, and nothing else!

02


Using perfectly transparent ice to prepare cocktails and drinks "on the rocks" clearly affects the appearance of the drink, giving a sensation of both refinement and quality. Ice, transparent as ice!

03

Incorrectly treated water almost always causes occlusions in pipes. The flow rate is reduced, annoying leaks can occur, the components are subjected to greater stress, and so are you!

Products

The advantage of installing an ice filter or reverse osmosis machine is obvious: you get clearer water, free of flavours or odours. The better the water, the better the ice.

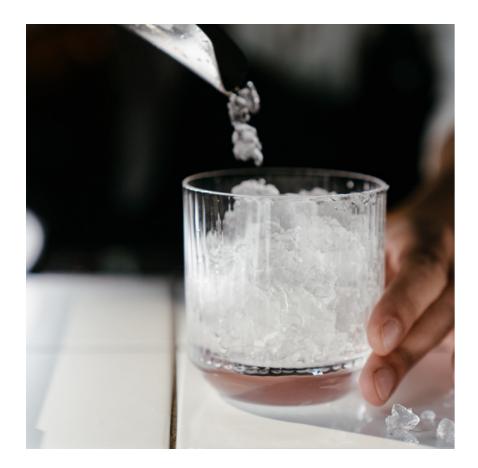

Profine

₩ BLUE ____ p.14 ₩ ICE ____ p.16 *** ZERO PROFESSIONAL** ____ p.20

-- ice --



Profine® Blue Drinking water dechlorination and clarification.





microfiltered water

Profine[®] Blue, thanks to the Profine[®] Carbon Block technology, reduces and removes cloudiness present in the water, as well as chlorine and any tastes and smells. Nominal filtration degree $5 \,\mu$ m. Complies with DM 25/2012.

- Eliminates unwanted odours and flavours
- Reduces chlorine •
- Reduces the cloudiness of the water •
- Reduces the presence of any organic macromolecules

| CODE | DESCRIPTION | FLOW RATE | CAPACITY* | | |
|---|----------------------|-----------|-----------|--|--|
| Y21409B-AXW | Blue Small Profine® | 3 L/min | 15.000 L | | |
| Y21408B-AXT | Blue Medium Profine® | 5 L/min | 24.000 L | | |
| Y21407B-AXQ | Blue Large Profine® | 7 L/min | 45.000 L | | |
| * The capacities may vary according to the French degrees (° f) from the organoleptic properties and the flow rate of the incoming water. | | | | | |

Operating pressure

Temperature

Min. 2 - Max. 6 bar (0.2 - 0.6 Mpa) Min. 4 - Max. 30°C (40 - 86 °F)







-- ice -



Profine® Ice **Reduction of carbonates** and microfiltration.





microfiltered water

The Profine® ICE cartridge has a first filtering and absorbent stage made with 0.5 µm Profine Carbon Block technology® that eliminates unpleasant odours and flavours and imparts a bacteriostatic action.

An anti-limescale final stage offers protection against the precipitation of limescale even at low temperatures, such as those in ice production systems.

| CODE | DESCRIPTION | FLOW RATE | CAPACITY* |
|-------------|-------------|-----------|-----------|
| Y21463B-AZX | ICE Mini | 1 L/min | 6.000 L |
| Y21464B-AZY | ICE Small | 1,5 L/min | 10.000 L |
| Y21465B-B11 | ICE Medium | 2,5 L/min | 22.000 L |
| Y21466B-B13 | ICE Large | 3,5L/min | 30.000 L |

Operating pressure

Temperature





-- ice --

Min. 2 - Max. 6 bar (0.2 - 0.6 Mpa) Min. 4 - Max. 30°C (40 - 86 °F)



easy:wash Professional washing artist.





For those who make washing a profession, it will never leave halos. It drastically reduces the use of rinse aids and detergents in Ho.Re.Ca field. In other sectors it will make life easier where using finely osmotic water is required. 120 l/h and an inner pressure tank of 24 l of treated water satisfy every type of required washing cycle.

| Compatible dimensions with the needs of the Ho.Re.Ca sector | Pr |
|---|----|
| Capillary system for the calibration of the recovery rate | Сс |
| Wheels equipped | Ву |
| Modular internal structure | Οι |
| High water reserve | |

| Equivalent sound level measured during normal operation (dB (A)) | <7 |
|--|----|
| Membranes | nr |
| Prefiltration on board | Pr |
| Weight | 30 |
| Flow rate | 12 |
| Alarms | Ar |
| Connections | IN |
| Drain | 6 |
| Tank | 20 |
| Dimensions | 30 |
| | |



reloaded break tank

Continuous work 24 hours a day

Bypass valve system

Dutput conductivity adjustment

<70

nr. 2

Profine® Blue Medium

30 kg

120 l/h at 15°C

Anti-flooding / Minimum pressure / Filter change

N 3/4"M - BSP | OUT 3/4"M - BSP

mm quick coupling

20 L

300 x 445 h 700 mm



Profine® ZERO PROFESSIONAL

Reverse osmosis system for water with low salt content.



osmotic water

A hyperfiltration incredibly in harmony with nature. Because this new system of reverse osmosis has been devised while thinking about the natural forces that move water. Without the use of a pump and electricity, Zero Professional provides 3 litres of finely osmotised water per minute. Includes pre-treatment and post-treatment, mounting bracket and conductivity adjustment screw.

- High instantaneous flow rate •
- Without requiring electrical energy
- Including active carbon and pre-treatment and post-treatment filters
- Integrated expansion tanks with patented functions
- Layout of the system that creates major savings in the water used
- Exclusive and compact design
- Integrated support bracket for horizontal and vertical mounting
- Conductivity adjustment screw

| CODE | DES |
|--------------------|------|
| OF80002000N-ALK | Prot |
| | |
| | |
| Operating pressure | 1,5 |
| Temperature | Mir |

Hourly flow rate Pre-Post filtration

-- products --






SCRIPTION

ofine[®] Zero Professional

5 bar/6 bar | 21.7 PSI/87 PSI Min. 4 - Max. 30°C (40 - 86 °F) 24 l/h (4 bar)

Profine® Carbon Block 5 µm

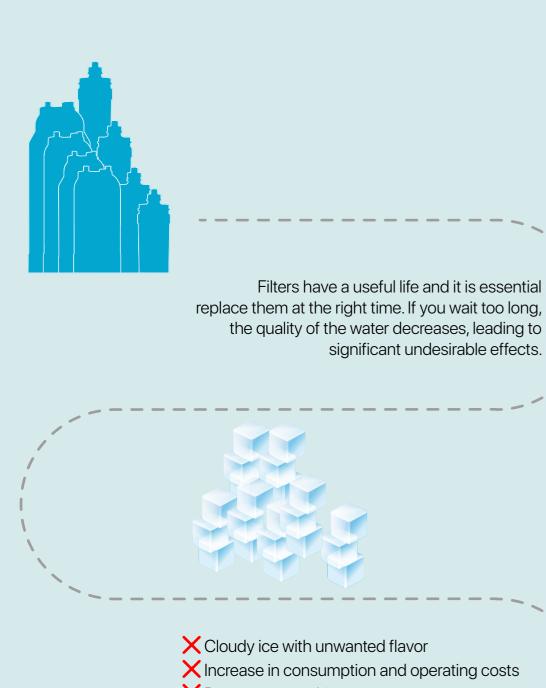

- X Damage to machinery
- × Frequent machine maintenance
- X Reduction of the useful life of the machines

rofine



Credits

Graphics: **t**W MKT Department

Keep in touch

facebook.com/profineitalia instagram.com/profine_italia youtube.com/profine cartridge linkedin.com/profine srl

#lifewithoutplastic

Do you need support to choose the right solution? Our team can help you get the best results by operating together with you the most appropriate choices for your business.



07

think:water **Profine**

lce

Via delle Pezze 35 35013 Cittadella (PD) Italy

tel: + 39 049 9403526 fax: +39 049 8598579

mail: info@thinkwater.com

thinkwater.com profinefilter.com shop.profinefilter.com